


Sundance® Spas 680 Prado™

Specifications

<p>Dimensions 80" x 80" x 33" (203 cm x 203 cm x 84 cm)</p> <p>Perimeter 320" (812.8 cm)</p> <p>Seating Capacity 4-5 Adults</p> <p>Dry Weight TBD lbs (TBD kg)</p> <p>Filled Weight (Spa Volume) TBD lbs (TBD kg)</p> <p>Filled Weight (Average Fill) TBD lbs (TBD kg)</p> <p>Water Capacity (Spa Volume) TBD US gallons (TBD Liters)</p> <p>Water Capacity (Average Fill) TBD US gallons (TBD Liters)</p> <p>Electronic Controls Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles</p> <p>Pump 1 North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous</p> <p>Total Hydrojets: 26</p> <p>Seat A Jets: 3 - SL3, 1 - SL5R</p> <p>Seat B Jets: 1 - SLR, 1 - SL3, 8 - SL</p> <p>Seat C Jet: 1 - SL3R</p> <p>Seat D Jets: 6 - SL3</p> <p>Seat E Jets: 4 - SL3R</p> <p>Air Controls/Massage Selectors: ...2/None</p> <p>Filter: 75 ft² MicroClean® Mini™ Filter Cartridge System</p> <p>Water Treatment: Factory installed CLEARRAY® unit</p> <p>Lighting: LED Lighting System (Interior Surround); 2 Standard Exterior Lights</p> <p>Cabinet: Available in Slate, Graphite</p> <p>Shell Colors: North America: Platinum, Celestite (Gypsum), Monaco, Midnight, Porcelain Export (50 Hz): All North America colors</p> <p>Headrest: Four, 1-piece gray</p> <p>Heater: North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW</p> <p>Electrical Requirements: North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</p> <p>Limited Warranty*: North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</p> <p>Alternative Insulation (Standard): .. Yes (Insulation Panels)</p> <p>Waterfall Feature: None</p> <p>Audio System (Optional): N/A</p> <p>Special Features (Optional): Factory Installed SmartTub® module</p>	
--	---

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Operation/Seat Depths



(A) Air control - Activates Seat A Jets (3 - SL3, 1 - SL5R) + Seat B Jets (1 - SLR, 1 - SL3, 8 - SL) + Seat C Jet (1 - SL3R)

(B) Air control - Activates Seat D Jets (6 - SL3) + Seat E Jets (4 - SL3R)

- Jets Pump 1: Powers All Jets when running

26 Total Jets



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 23.50" (59.69 cm)
B = 20.75" (52.71 cm)
C = 25.00" (63.50 cm)
D = 22.00" (55.88 cm)

E = 25.50" (64.77 cm)
F = 23.75" (60.33 cm)
G = 21.75" (55.25 cm)
H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Portable Dimensions

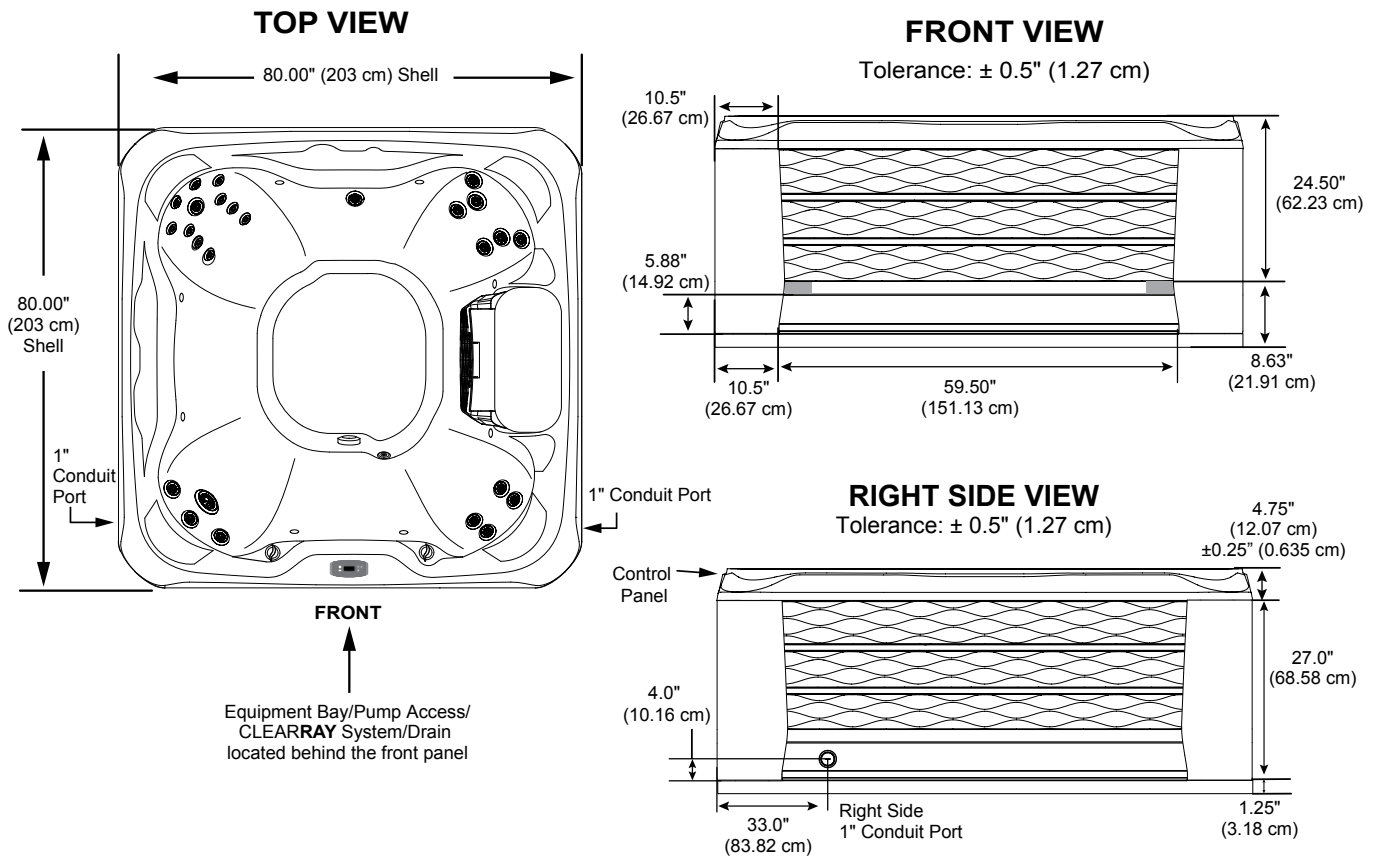

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

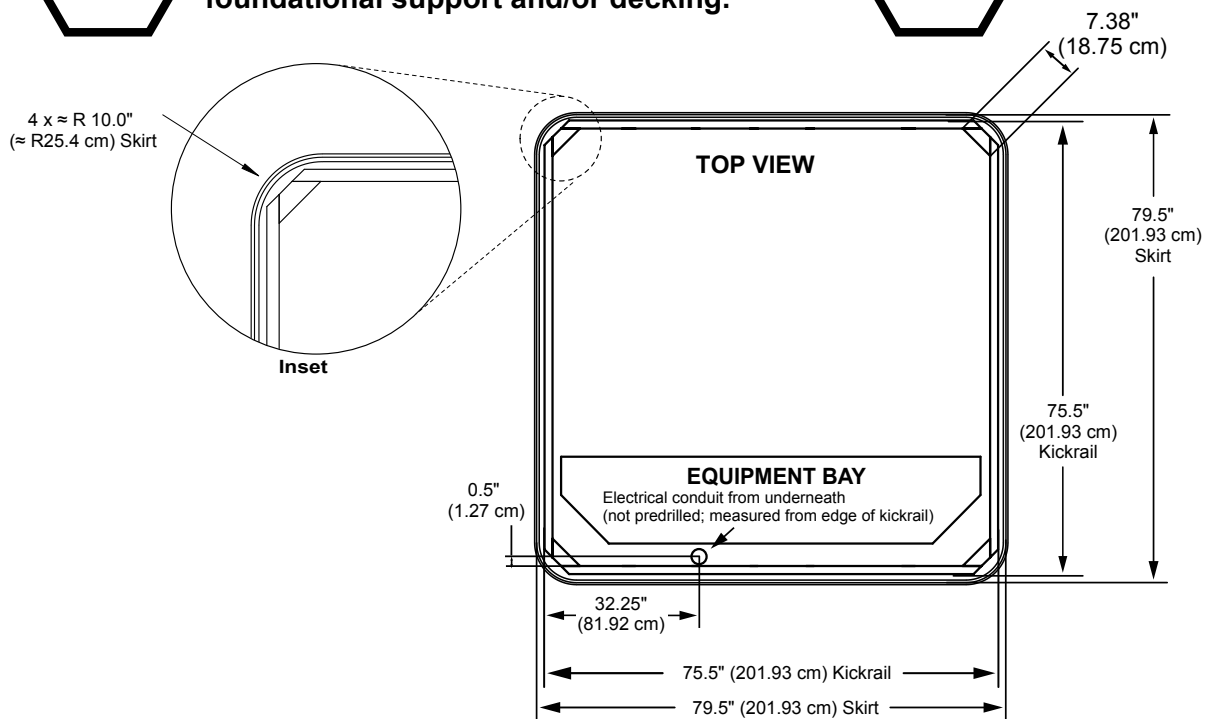

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice